


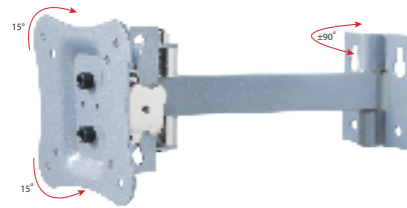



## LCD/TFT TV WALL MOUNT

### VM-L11



### VM-L12


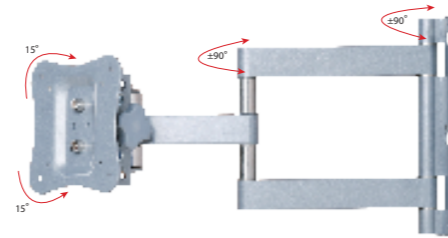


Adjustment knob locks tilt setting in place and allows continuous adjustment



mm/inch

Model		Max.	Distance to the wall	color	Tilt	VESA
VM-L11	58-94cm/23-37"	37kg/80lbs	97-204mm/3.8-8.0"	Silver/Black	±15°	75/100
VM-L12	58-94cm/23-37"	37kg/80lbs	92-380mm/3.6-15.0"	Silver/Black	±15°	75/100



### VM-L13

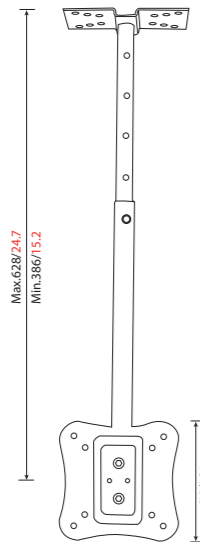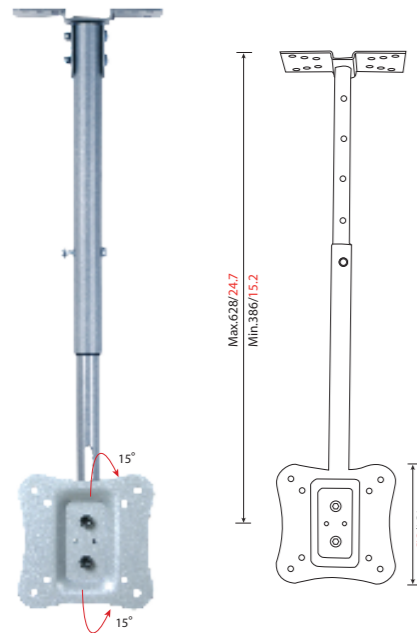

### VM-L14

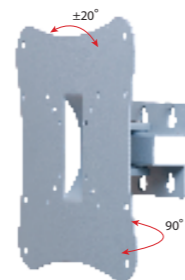

### VM-L15

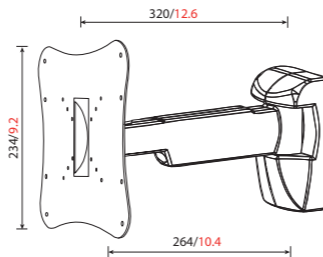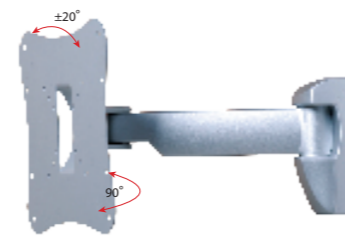


mm/inch

Model		Max.	Distance to the wall	color	Tilt	VESA
VM-L13	58-94cm/23-37"	37kg/80lbs	386-628mm/15.2-24.7"	Silver/Black	±15°	75/100
VM-L14	58-94cm/23-37"	37kg/80lbs	93mm/3.7"	Silver/Black	±20°	50/75/100/200/200*100
VM-L15	58-94cm/23-37"	37kg/80lbs	113-320mm/4.4-12.6"	Silver/Black	±20°	50/75/100/200/200*100

## PROJECTOR MOUNT


### VM-PR01

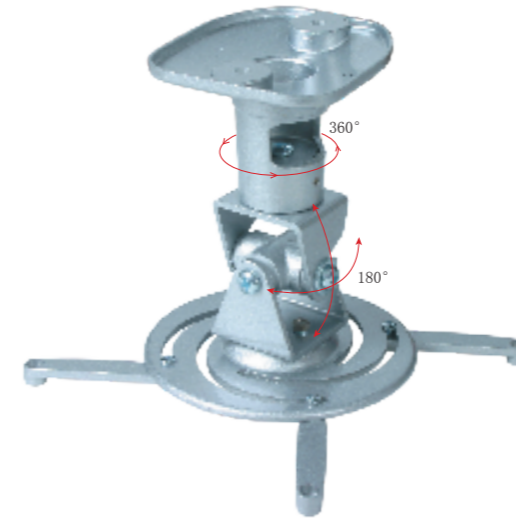

- Four movable support arms allow flexible positioning to almost any mounting point
  - 90° yaw and pitch function
  - 360° rotation and lock function after direction selected
  - Can be used with vaulted or cathedral ceilings, and single studs or solid ceiling surfaces
  - Cable-routing channel for a clean look
- Maximum weight 13.75kg/30lbs

### VM-PR01L

- Minimum distance from ceiling 350mm (13 3/4")
- Maximum distance from ceiling 600mm (23 1/2")
- Pipe adjustable increment 25mm
- Four movable support arms allow flexible positioning to almost any mounting point.
- Pitch and roll adjustment of +/- 45°
- 360° rotation
- lock function after direction selected
- Can be used with vaulted or cathedral ceilings and single studs or solid ceiling surface
- Cable-routing channel for a clean look
- Quick release for easy maintenance
- Maximum weight 13.75/30lbs

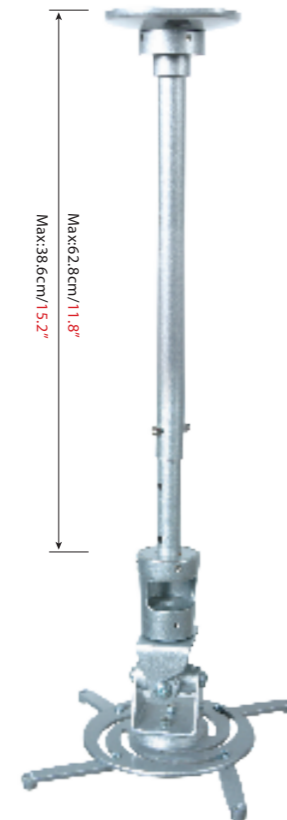

### VM-PR02

- Four movable support arms allow flexible positioning to almost any mounting point
- 360° rotation with 15° tilt and roll
- Cable-routing channel for a clean look
- Maximum weight 13.75kg/30lbs
- 3", 6", 12" pipe length are optional, and special pipe length can be also supplied.